

# FINISH-POOL®

DATE SHEET FINISH-POOL ARKYX®

## DESCRIPTION AND CHARACTERISTICS

**Finish-Pool®** Kit of products based of high resistance polimers, desiogned for applying over concrete walls, block walls, brick walls already plastered in good conditions, special for pools, cisterns, swimming pools, baths, water sources, ornamental sources, concrete surfaces, indoor or outdoor use exposed to immersion or moisture.

## USES AND APPLICATION

- ◇ **Cleanness:** Surfice completely dry and clean, free of dust, grease,oil,etc.
- ◇ **Primer:** Inside of one clean and dry container mix-up 1 **liquid Micro-Arkyx®** Gal + 1 clean water gal (1:1 ratio) applying this primer over the whole surfice using a roller painter.




- ◇ **Finish-Pool®:** Mix-up 1 **Finish-Pool®** bucket 25kg (50lb)+ 1 **Liquid Micro-Arkyx®** Gal; adding very little water as necessary to get a homogenized pasty-mixture, using a electric dill with a mixer-pad. Immediately, apply this mixture Finish-Pool over the prime previously applied with a thickness not less than 1/16" nor greater than ¼". Using cement finishing trowel, moist the trowel constantly to get a good finishing bet ween layers applyied, showing the chosen color. Let dry for 24 hrs to check if the junction between layers needs a light sand-paper.



- ◇ **Sealer:** Once the **Finish-Pool®** application is finished, wait 1 to 2 days to apply the based-water **Sealer-Pool Arkyx®**, using brush or spreader, let dry it for 2 or 3 days approx to proceed to fill it with water. Ready! now you can enjoy your pool- the times mentioned before, vary depending on the climate and local temperatures.



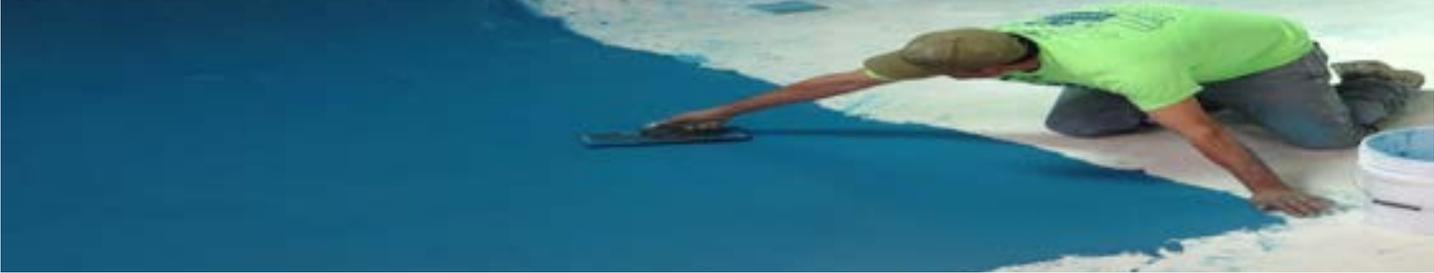

# FINISH-POOL®

DATE SHEET FINISH-POOL ARKYX®

## RECOMMENDATIONS


The surface of the new concrete must have a minimum of 28 days of drying to apply Finish-Pool®. Avoid to apply under extreme sunny weathers, windy and rainy environments, broom the area before apply it, if necessary; use an empty



Presentation	Covers
1 Bucket(50lb) Finish-Pool® +	e=1/16" → e=1/4"
1 Gal. Aditive MicroArkyx® Liquid	26sf-107sf 2.5-10m2

*\*Coverage and tones are aproximated to the King of materials absortion and the way of application.*



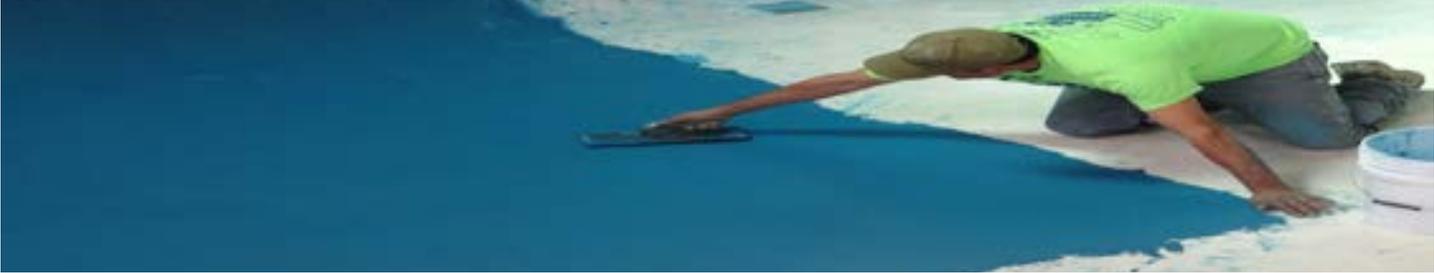

# FINISH-POOL®

DATE SHEET FINISH-POOL ARKYX®

## MANAGEMENT, STORAGE, CAUTION AND SECURITY

It's important to protect the product from not ordinary climates, keeping it in a close place and well located, avoiding bad diligences and attention for longer container and product duration. Thus, its useful life endures more than 13 months if the product remains in the original container with the unsealed lid. Do not manipulate this product with extra components to avoid its good use, for that; you should know the concrete floor historical to ensure and successful and good use of this product.

The quality of our products is supervised in respect of its distribution and election of the different colors, it's very important to follow the instructions to carry out a final and hopefully finish job. If you don't keep it the results could vary over the surface even with the kind of cement or the actual concrete floor.

## INFORMATION AND RECOMMENDATION

\*Use work clothes for application and protection of eyes, hands and other members, do not leave within reach of children, in case of eye contact rinse thoroughly with water and seek medical attention. \*All material is inspected before embarkation, the manufacturer ARKYX® is not responsible for expenses that arise in the installation, sale or resale, time and use of the product, freight charges, shipping and will be at the risk and expense of Buyer, each recommendation made by the manufacturer is based on own research and experiences that are emerging in areas of work in general.





# HDS

## FINISH-POOL®

DATE SHEET FINISH-POOL ARKYX®

FTFP270717I

### TECHNICAL DATA

Kit coerture: 1 Finish Pool® bucket 25kg(50lb) + 1 Liquid Micro-Arkyx® Gal. covers approximately 2.5 up to 10m2 (26sf-107sf) in a range not less than 1/16" nor greater than ¼" thickness. This will depend on the kind of surface. It is recommendable take a test before the application.

Aspect and touch: colored dust

Resistance: Excellent

Mixed with water: According as necessary (without exceeding) pasty mixture

Flammable: No

Featuring: Bucket 25kg (50lb approx)

Color: Azul Veneciano, Beige Stone, Verde Lago, Verde Mar...

See catalogue and technical data in: [www.arkyx.com](http://www.arkyx.com)

### WEARING

Keep out of reach of children. Protect this product from moisture. Wash hands before and after handling this product. Wear mouth cap and avoid eyes contact wearing eye glasses. If eyes contact occurs wash abundantly with water for 20 minutes and call in for medical assistance



*100% under the responsibility of the buyer the turn or use of the product, for their own needs and tastes.*

### SISTEMAS ARKYX®

Solidaridad #700 Local #15 entre Tepic y Camelia Col. Libertad C.P. 83130

Hermosillo Sonora, México. Tel.:(662)2186462 [ventas@arkyx.com](mailto:ventas@arkyx.com) | [www.arkyx.com](http://www.arkyx.com)





**FINISH-POOL®**

# Catalogue



*\*Approximate color*